




LEDONG Machinery Co., Ltd.

15 mm x 24 mm x 5 mm NTN 6802ZZ deep groove ball bearings

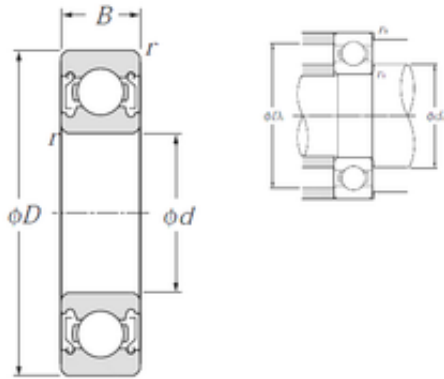

Bearing No. 6802ZZ

6802ZZ Bearing 2D drawings and 3D CAD models

Size	15x24x5 mm
Bore Diameter	15 mm
Outer Diameter	24 mm
Width	5 mm
d	15 mm
D	24 mm
B	5 mm
C	5 mm
r min.	0,3 mm
da min.	17 mm
da max	17,5 mm
Da max.	22 mm
ra max.	0,3 mm
Weight	0,007 Kg
Basic dynamic load rating (C)	2,08 kN
Basic static load rating (C0)	1,26 kN
(Grease) Lubrication Speed	26 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.007
EAN	4547359006100
Product Group	B00308
Enclosure	2 Metal Shields



LEDONG Machinery Co., Ltd.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	15MM Bore; 24MM Outside Diameter; 5MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6802ZZ/2AS
Weight / LBS	0.015
Bore	0.591 Inch 15 Millimeter
Outer Race Width	0.197 Inch 5 Millimeter
Outside Diameter	0.945 Inch 24 Millimeter
bore diameter:	15 mm
precision rating:	ISO Class 0
outside diameter:	24 mm
finish/coating:	Uncoated
overall width:	5 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round



LEDONG Machinery Co., Ltd.

cage material:	Steel
closure type:	Double Shielded
inner ring width:	5 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	5 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	26000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	26000 RPM
dynamic load capacity:	2080 N
series:	68
static load capacity:	1260 N
manufacturer product page:	Click here