




# LEDONG Machinery Co., Ltd.

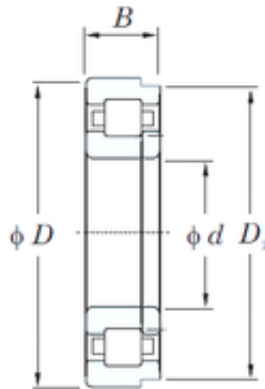

150 mm x 320 mm x 65 mm KOYO NUP330R cylindrical roller bearings

Bearing No. NUP330R

NUP330R Bearing 2D drawings and 3D CAD models

|                               |               |
|-------------------------------|---------------|
| Size                          | 150x320x65 mm |
| Bore Diameter                 | 150 mm        |
| Outer Diameter                | 320 mm        |
| Width                         | 65 mm         |
| d                             | 150 mm        |
| Fw                            | 193 mm        |
| D                             | 320 mm        |
| B                             | 65 mm         |
| C                             | 65 mm         |
| r min.                        | 4 mm          |
| r1 min.                       | 4 mm          |
| Weight                        | 27.0 Kg       |
| Basic dynamic load rating (C) | 757 kN        |
| Basic static load rating (C0) | 922 kN        |
| (Grease) Lubrication Speed    | 1700 r/min    |
| Bearing No.                   | NUP330R       |
| r(min)                        | 4             |
| r1(min)                       | 4             |
| Cr                            | 948           |
| C0r                           | 922           |
| Cu                            | 115           |
| Grease lub.                   | 1700          |
| Oil lub.                      | 2300          |
| Ew                            | -             |
| d1                            | -             |



## LEDONG Machinery Co., Ltd.

|                  |     |
|------------------|-----|
| B1               | -   |
| B2               | -   |
| da(min)          | 166 |
| db(min)          | 166 |
| db(max)          | 190 |
| dc(min)          | -   |
| dd(min)          | -   |
| Da(max)          | 304 |
| Db(max)          | -   |
| Db(min)          | -   |
| ra(max)          | 3   |
| rb(max)          | 3   |
| (Refer.)Mass(kg) | 29  |